

GENERAL NOTES

1. ALL WORK SHALL COMPLY WITH THE CALIFORNIA RESIDENTIAL CODE (CRC), CBC, CEC, CMC, CPC, CALIFORNIA ENERGY CODE (TITLE 24 PART 6), AND CALGREEN AS AMENDED BY THE LOCAL JURISDICTION. VERIFY THE ENFORCED CODE CYCLE BEFORE SUBMITTAL.
2. WRITTEN DIMENSIONS GOVERN OVER SCALED DIMENSIONS.
3. VERIFY ALL DIMENSIONS AND SITE CONDITIONS BEFORE CONSTRUCTION.
4. SMOKE ALARMS PER CRC R314; CARBON MONOXIDE ALARMS PER CRC R315.
5. EMERGENCY ESCAPE AND RESCUE OPENINGS PER CRC R310.
6. CONTRACTOR SHALL VERIFY ALL UTILITY LOCATIONS BEFORE EXCAVATION.
7. THIS SET IS A PRELIMINARY DRAWING SKELETON. A QUALIFIED PROFESSIONAL MUST REVIEW, COMPLETE, AND APPROVE EVERY SHEET BEFORE ANY PERMIT SUBMITTAL.

PROJECT DATA

PROJECT: DEMO BACKYARD STUDIO

LOCATION: CALIFORNIA, USA

LOT: 50 x 120 FT (6000 SF)

BUILDING FOOTPRINT: 20 x 24 FT (480 SF)

LOT COVERAGE: 8.0%



WALL HEIGHT: 9'-0"


ROOF: GABLE 4:12, 1 FT OVERHANG


OCCUPANCY / CONSTRUCTION TYPE: BY DRAFTER

PROJECT NOTES


1. DEMO INPUT ONLY; DIMENSIONS AND SETBACKS ARE PLACEHOLDERS.
2. NO CODE COMPLIANCE OR PERMIT READINESS IS IMPLIED.

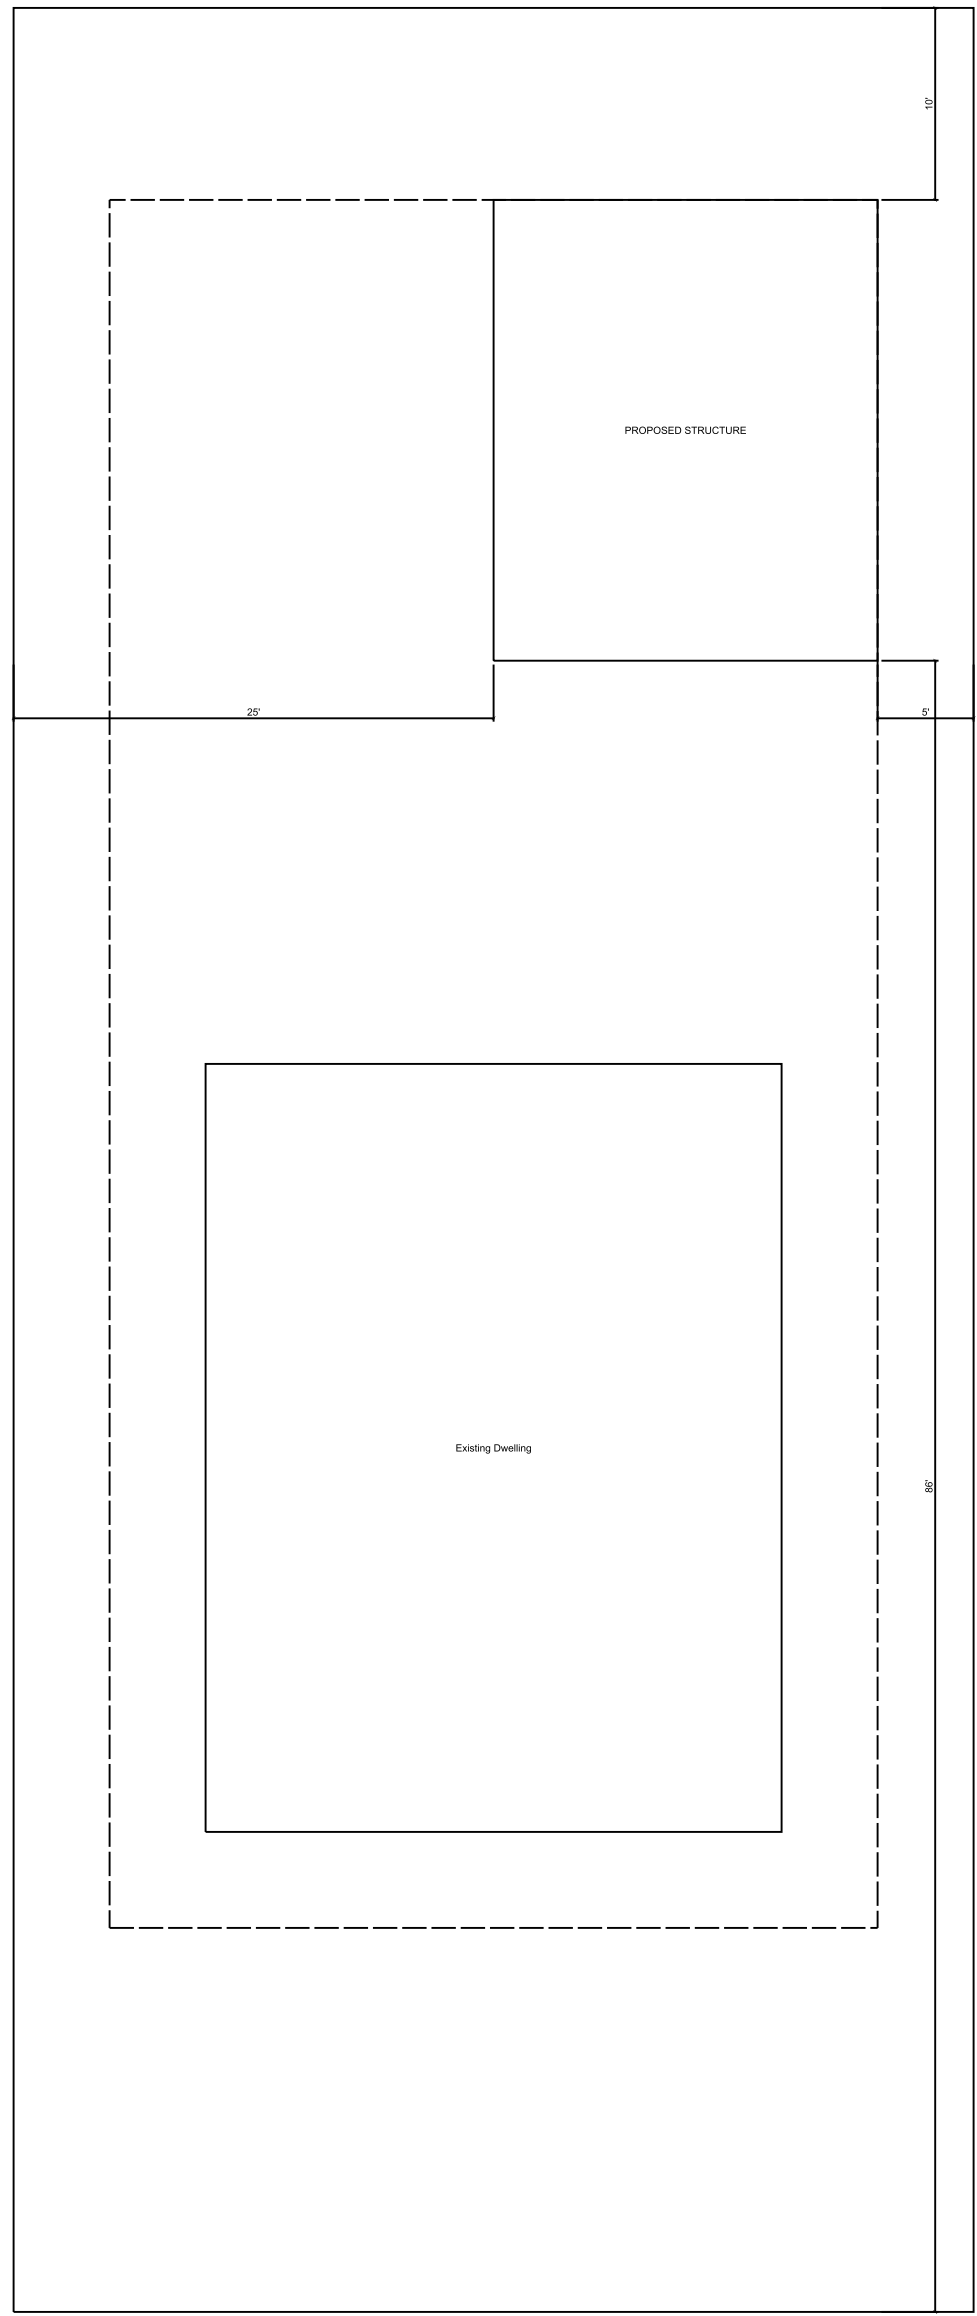

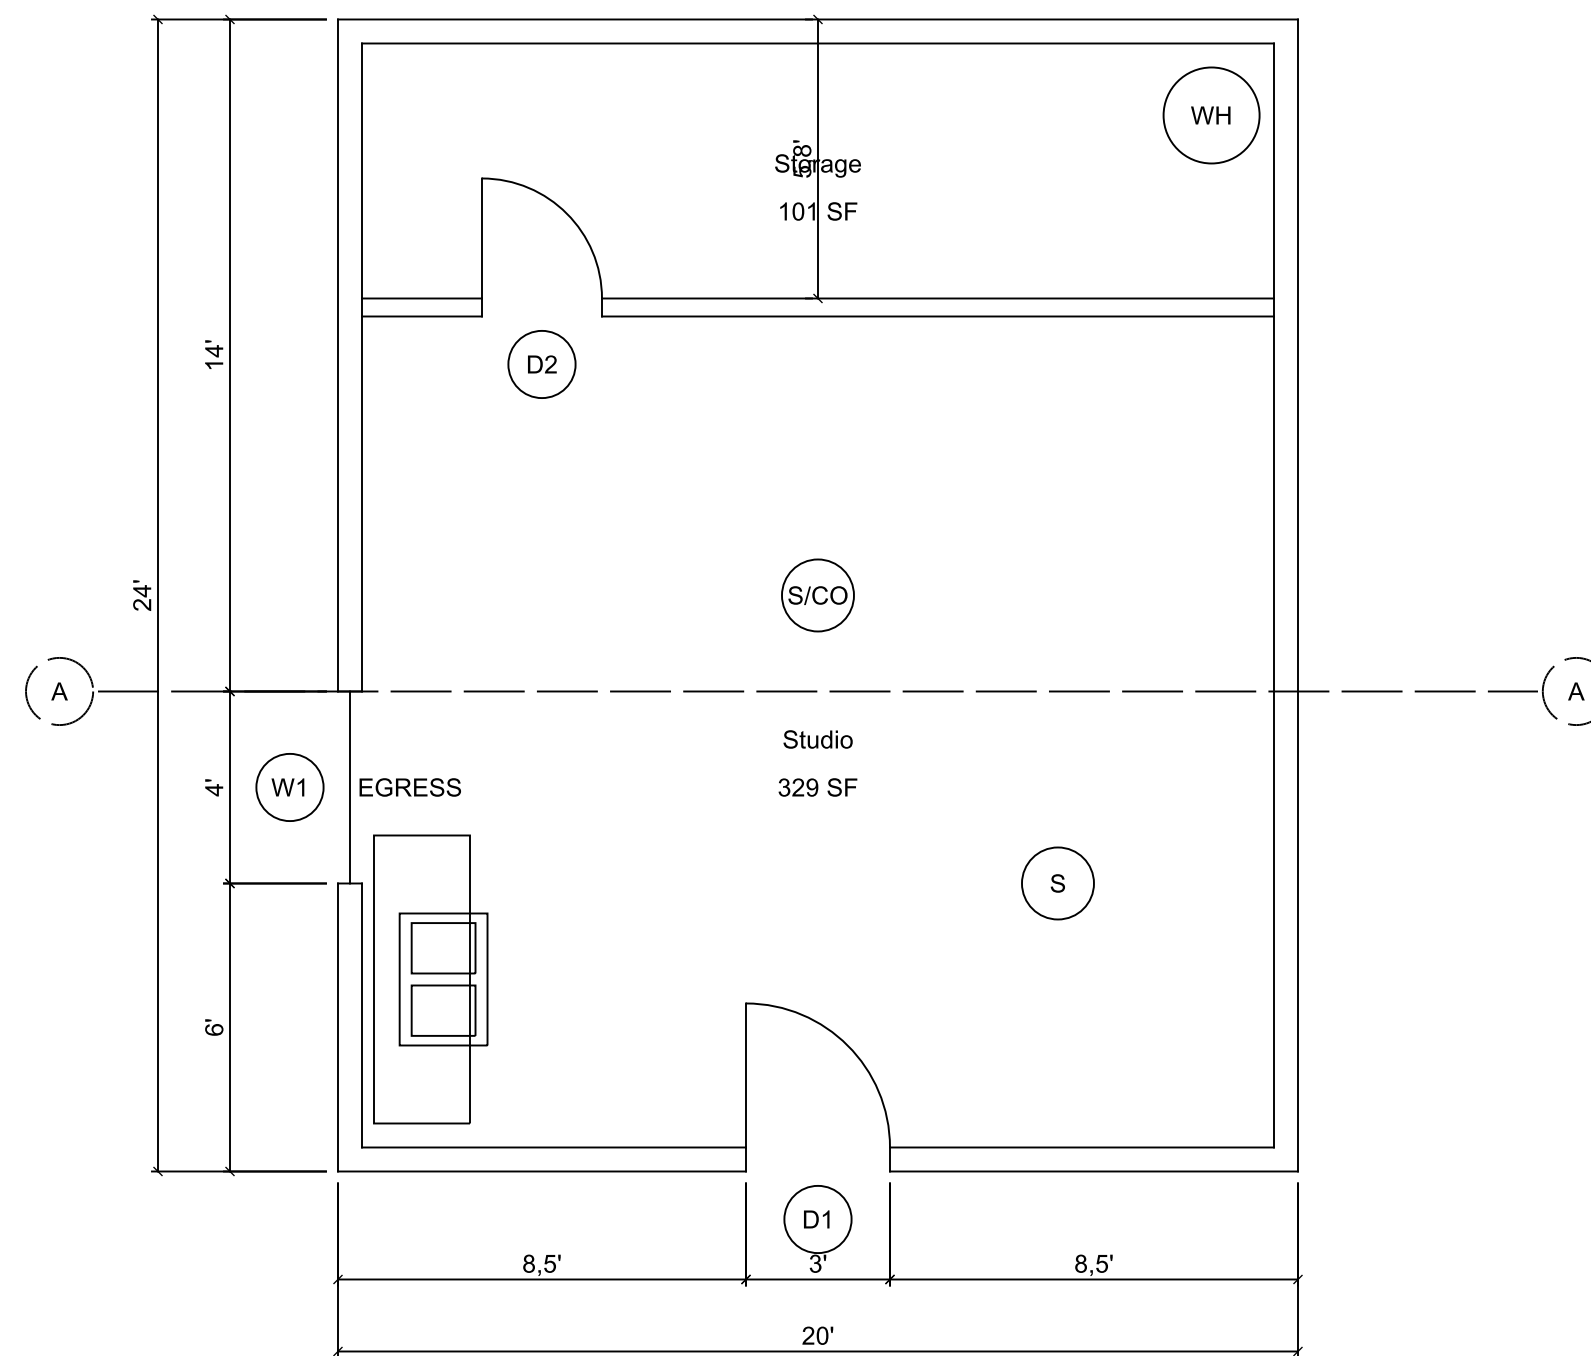


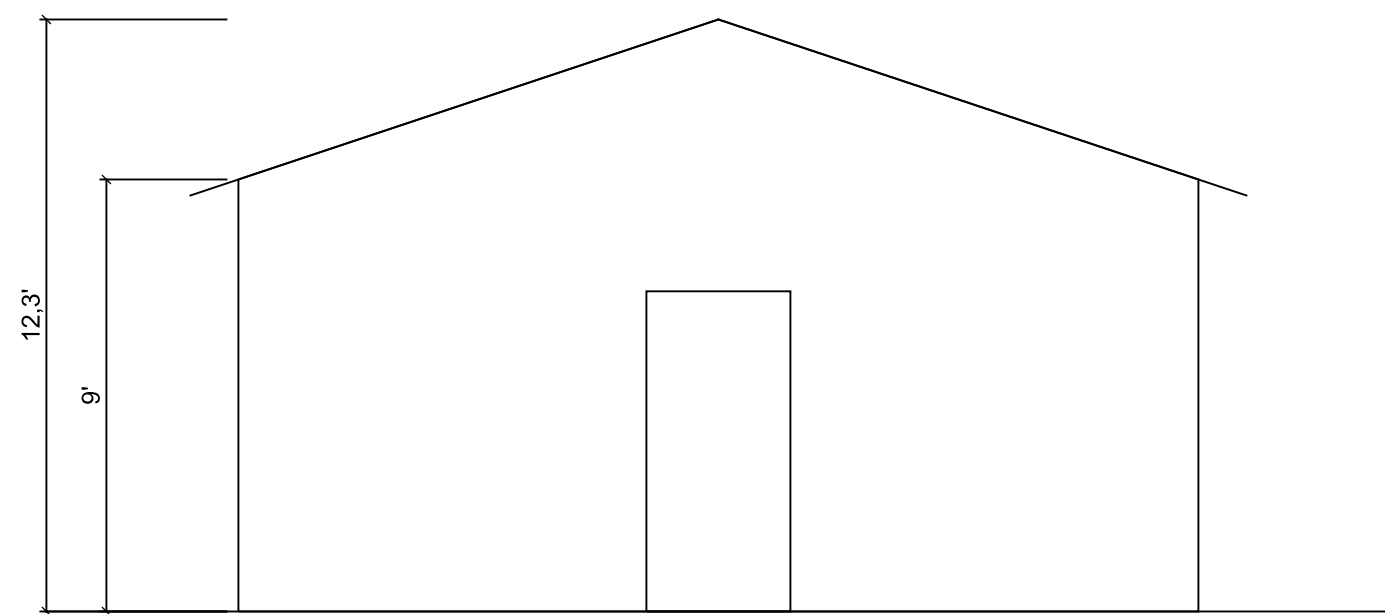


FRONT ELEVATION

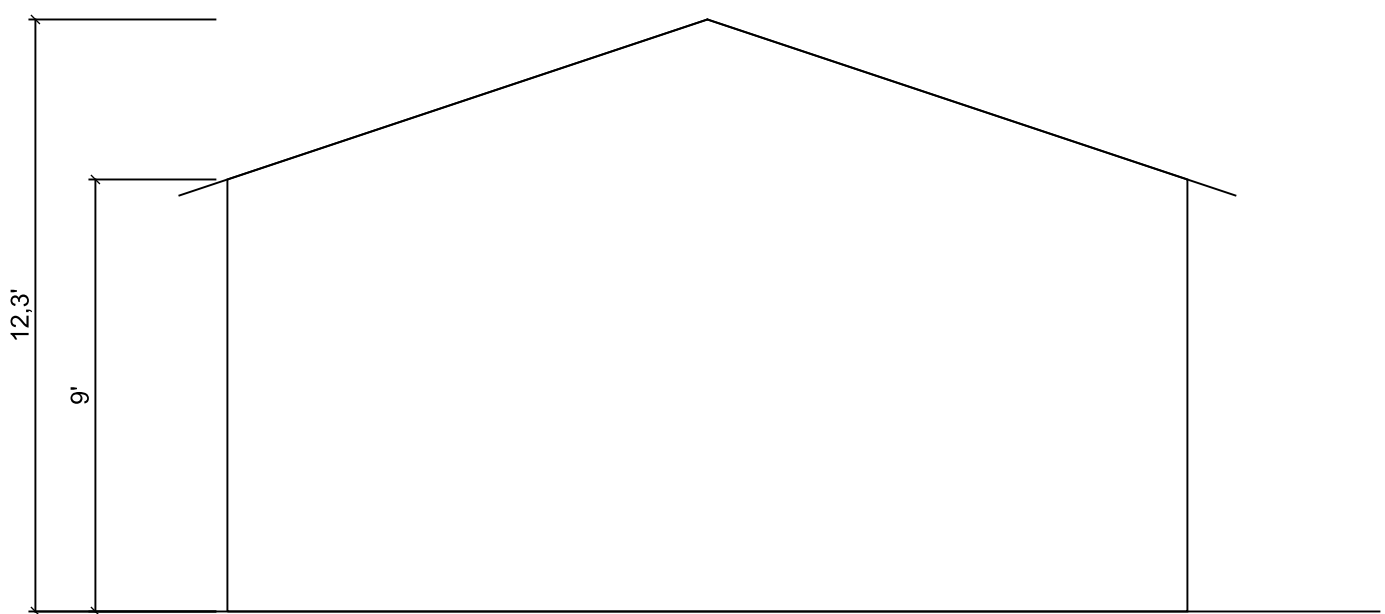


REAR ELEVATION

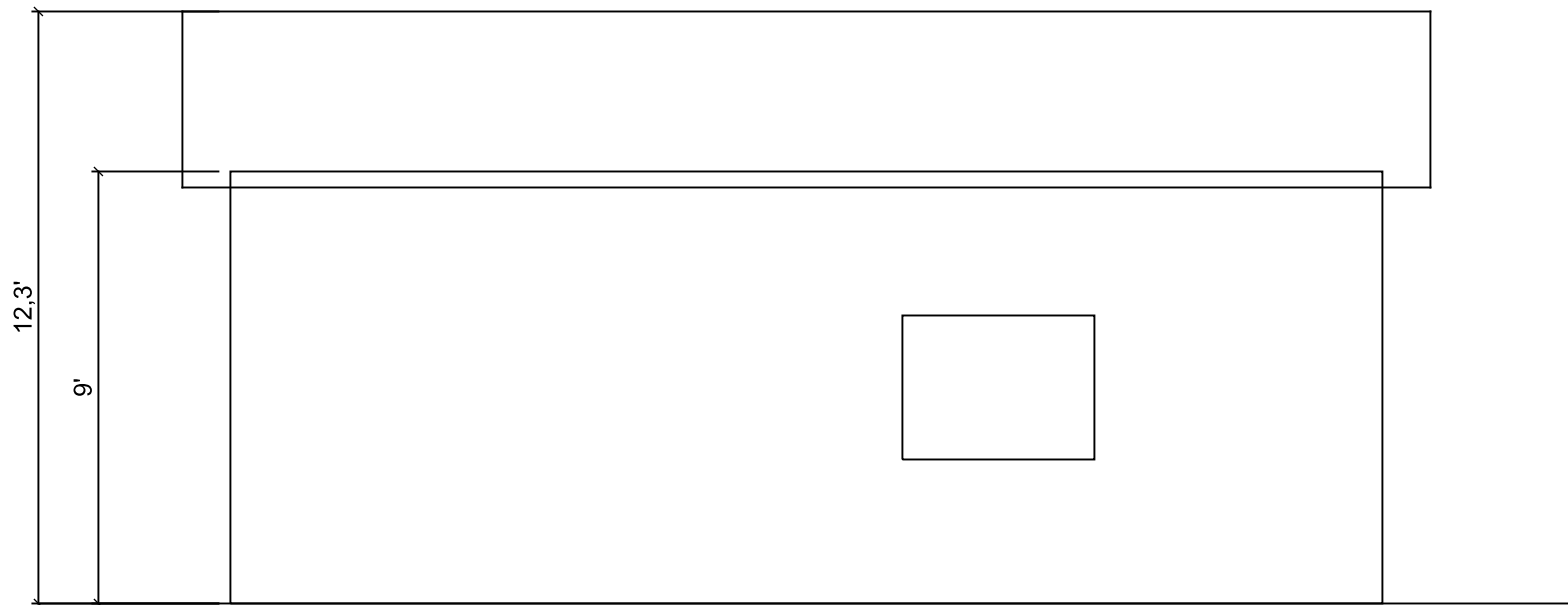

LEFT ELEVATION

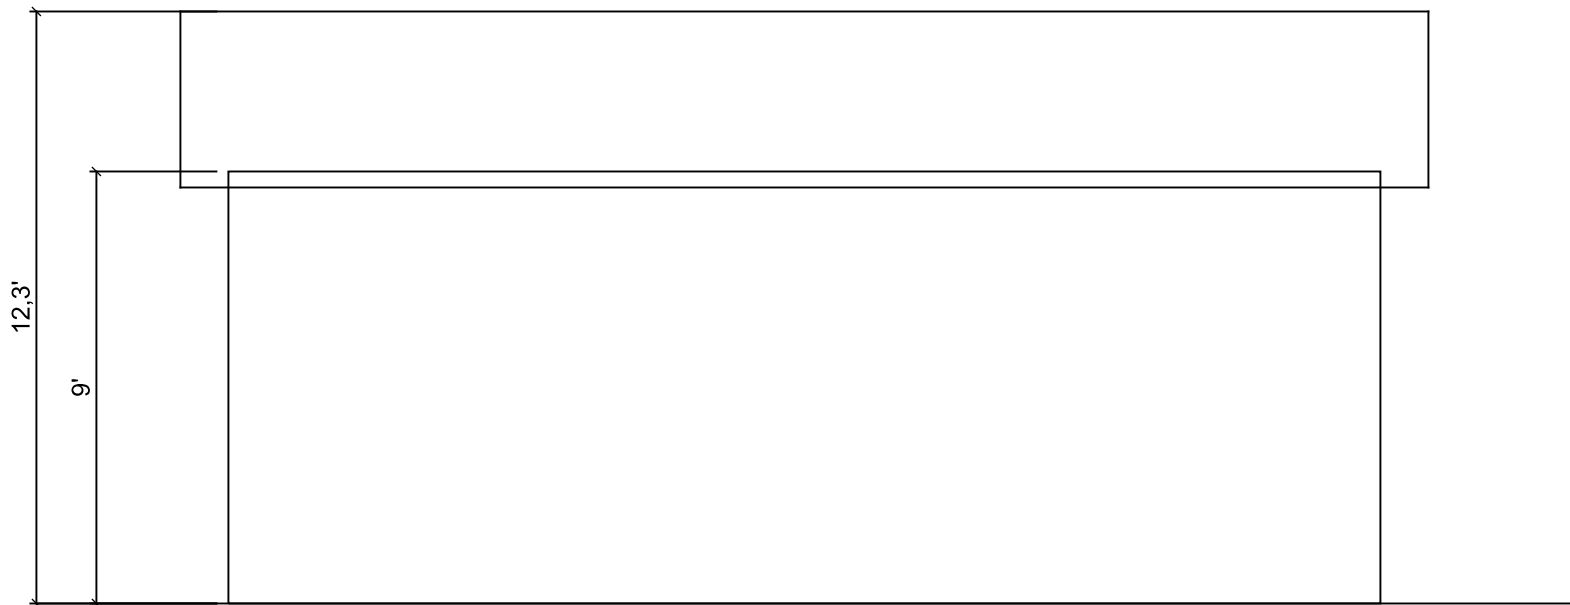


RIGHT ELEVATION

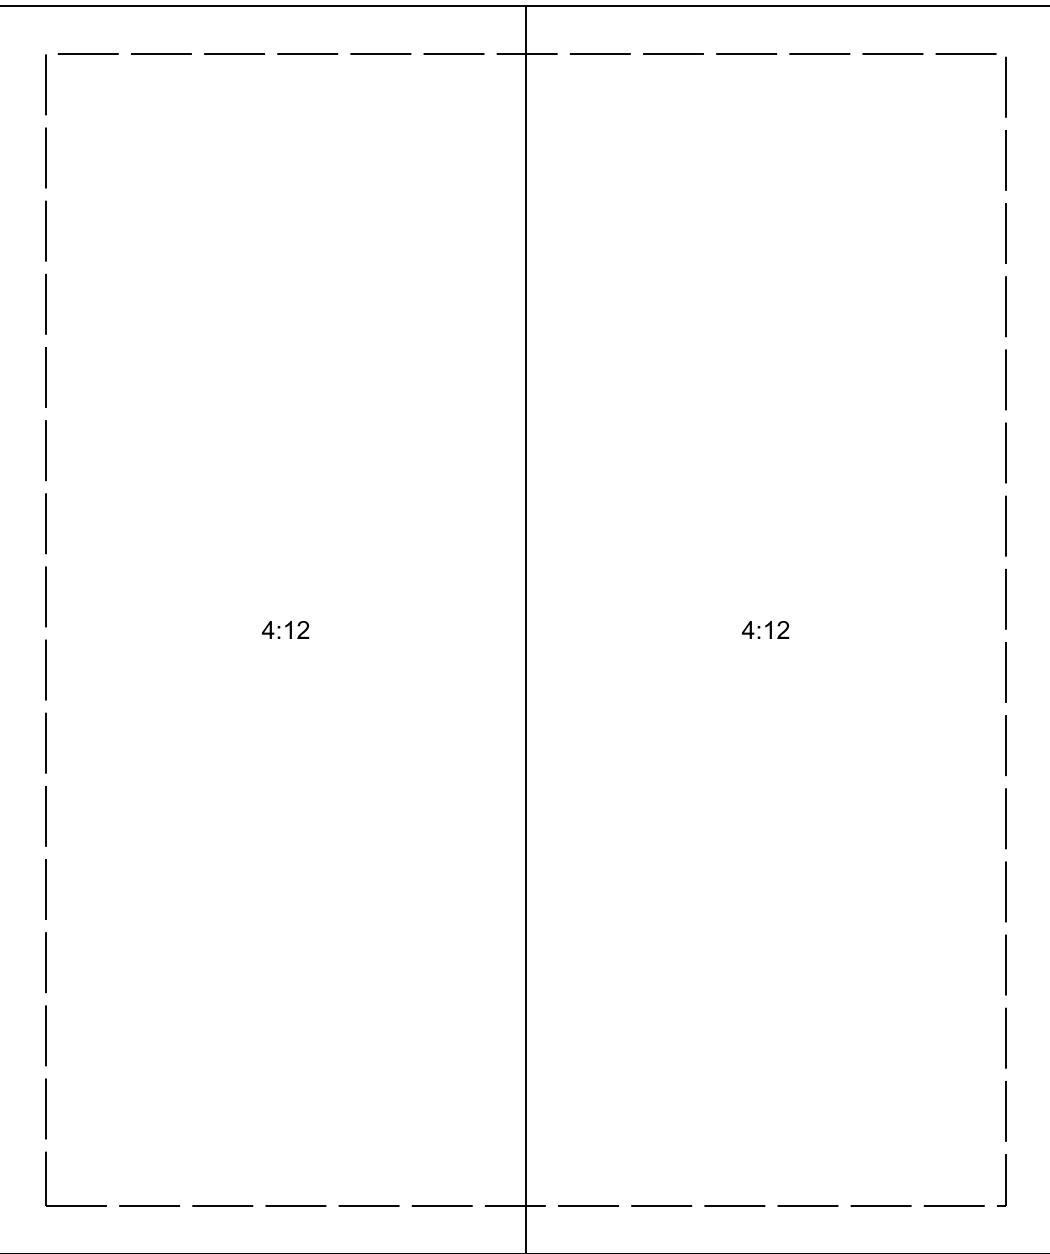


ROOF PLAN

DOOR SCHEDULE					
MARK	WIDTH	HEIGHT	TYPE	QTY	REMARKS
D1	3'-0"	6'-8"	EXTERIOR	1	
D2	2'-6"	6'-8"	INTERIOR	1	

WINDOW SCHEDULE					
MARK	WIDTH	HEIGHT	SILL	QTY	REMARKS
W1	4'-0"	3'-0"	SILL 3'-0"	1	EGRESS

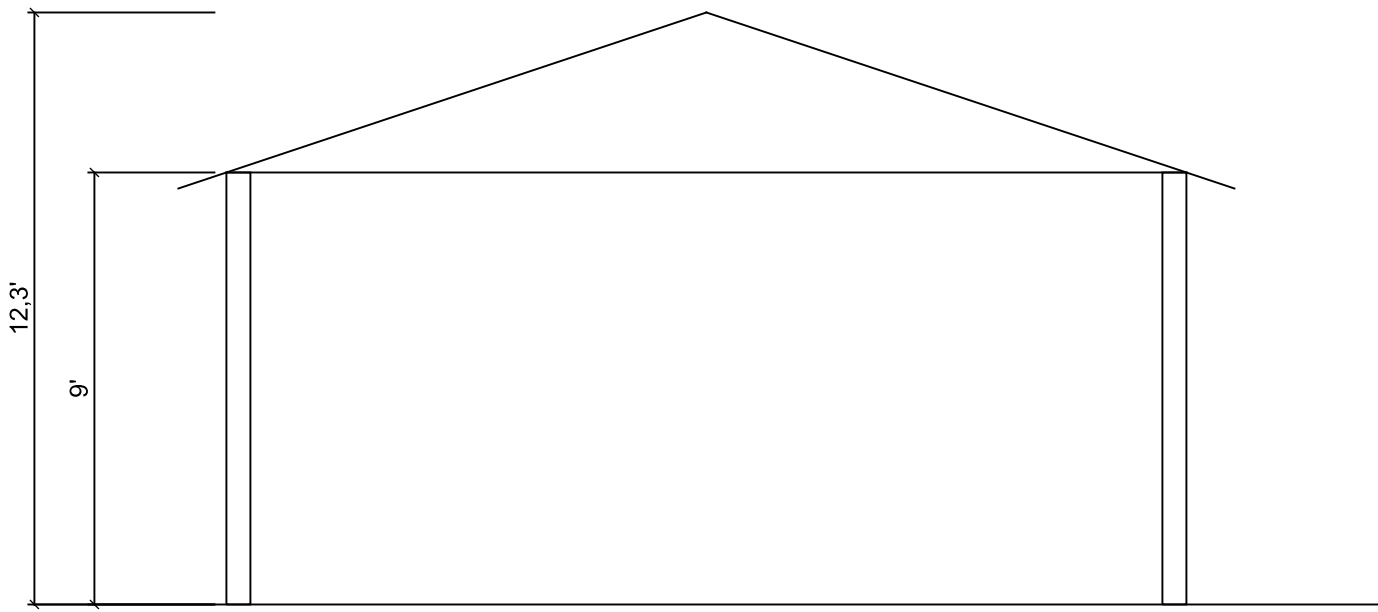


SECTION A-A

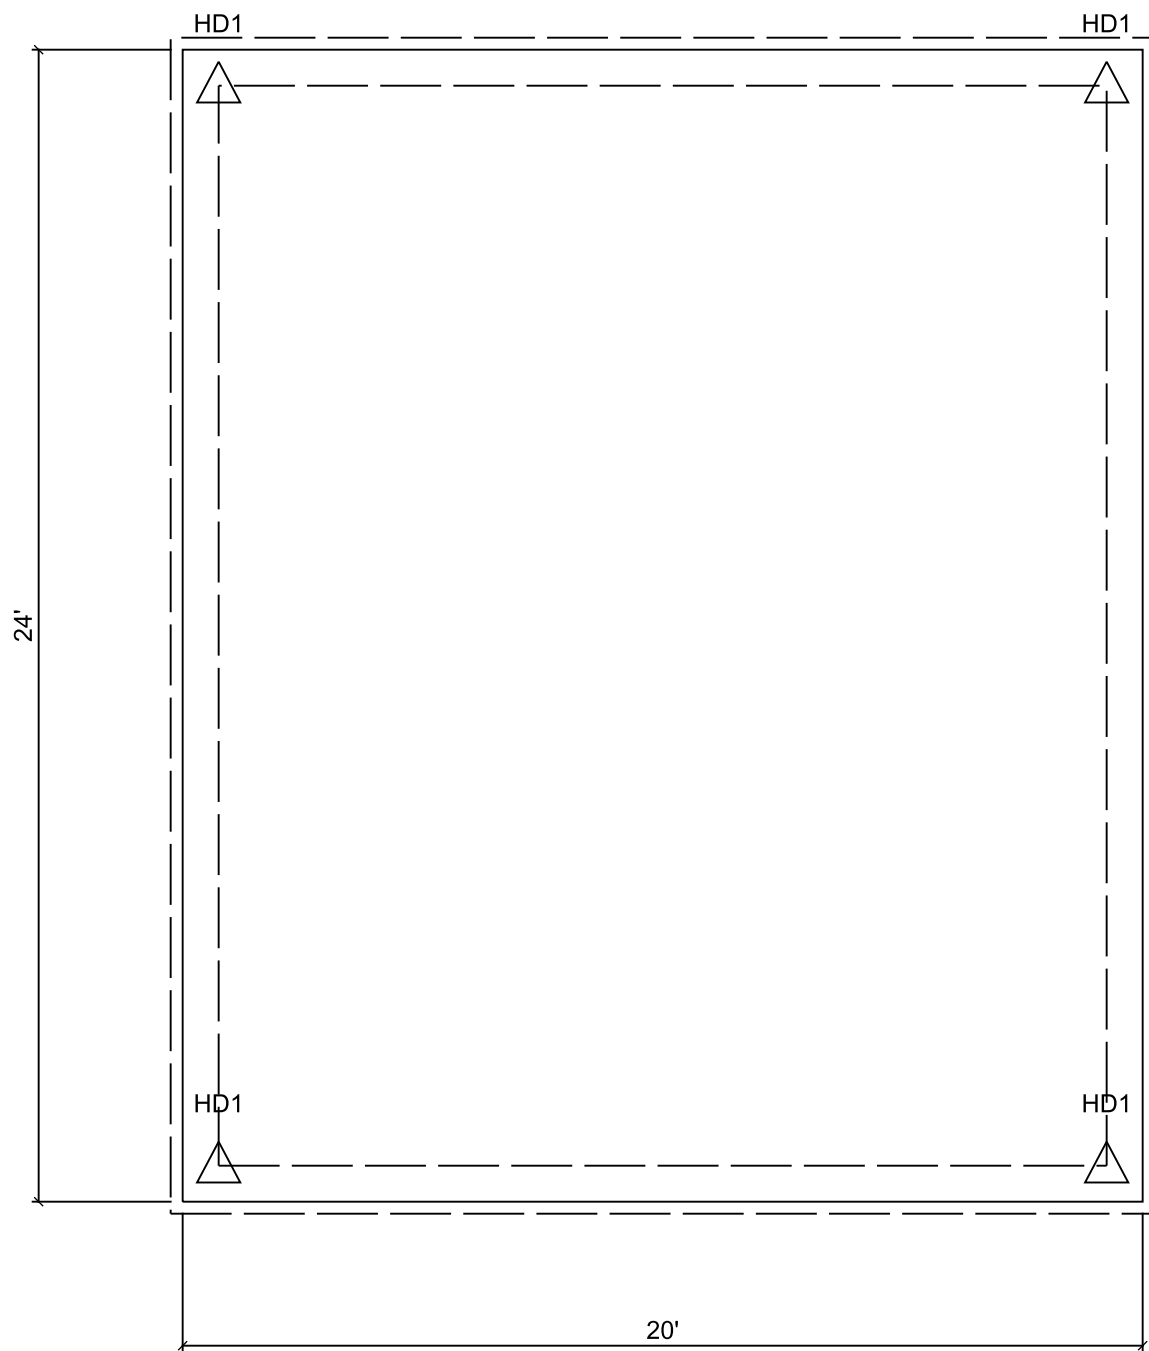

FOUNDATION PLAN

FOUNDATION NOTES

CONCRETE: MIN 2,500 PSI AT 28 DAYS (CRC R402.2).
CONTINUOUS FOOTING: 1'-0" WIDE x 1'-0" DEEP MIN, BOTTOM 12 IN
MIN BELOW UNDISTURBED GRADE (CRC R403.1.4), REINF: (1) #4 TOP,
(1) #4 BOTTOM (CRC R403.1.3, SDC D0-D2).
SLAB: 3.5 IN CONCRETE SLAB (CRC R506.1) OVER 10-MIL VAPOR RETARDER
(ASTM E1745 CLASS A, CRC R506.2.3 AS LOCALLY AMENDED) OVER 4 IN BASE.
ANCHOR BOLTS: 1/2 IN DIA AT 6'-0" O.C. MAX, 7 IN MIN EMBEDMENT, MIN 2
PER PLATE SECTION, ONE WITHIN 12 IN OF EACH PLATE END (CRC R403.1.6);
3x3x0.229 IN PLATE WASHERS AT BRACED WALL LINES (CRC R602.11.1).
HOLD-DOWNS PER PLAN; SIZE, MODEL, AND EMBEDMENT BY DRAFTER, KEYED
TO THE BRACED WALL SCHEDULE.
SOIL: 1,500 PSF ASSUMED BEARING; VERIFY. SOILS REPORT WHERE REQUIRED.
PRELIMINARY SKELETON: A QUALIFIED PROFESSIONAL MUST VERIFY ALL
FOUNDATION SIZES, REINFORCING, AND HARDWARE BEFORE SUBMITTAL.

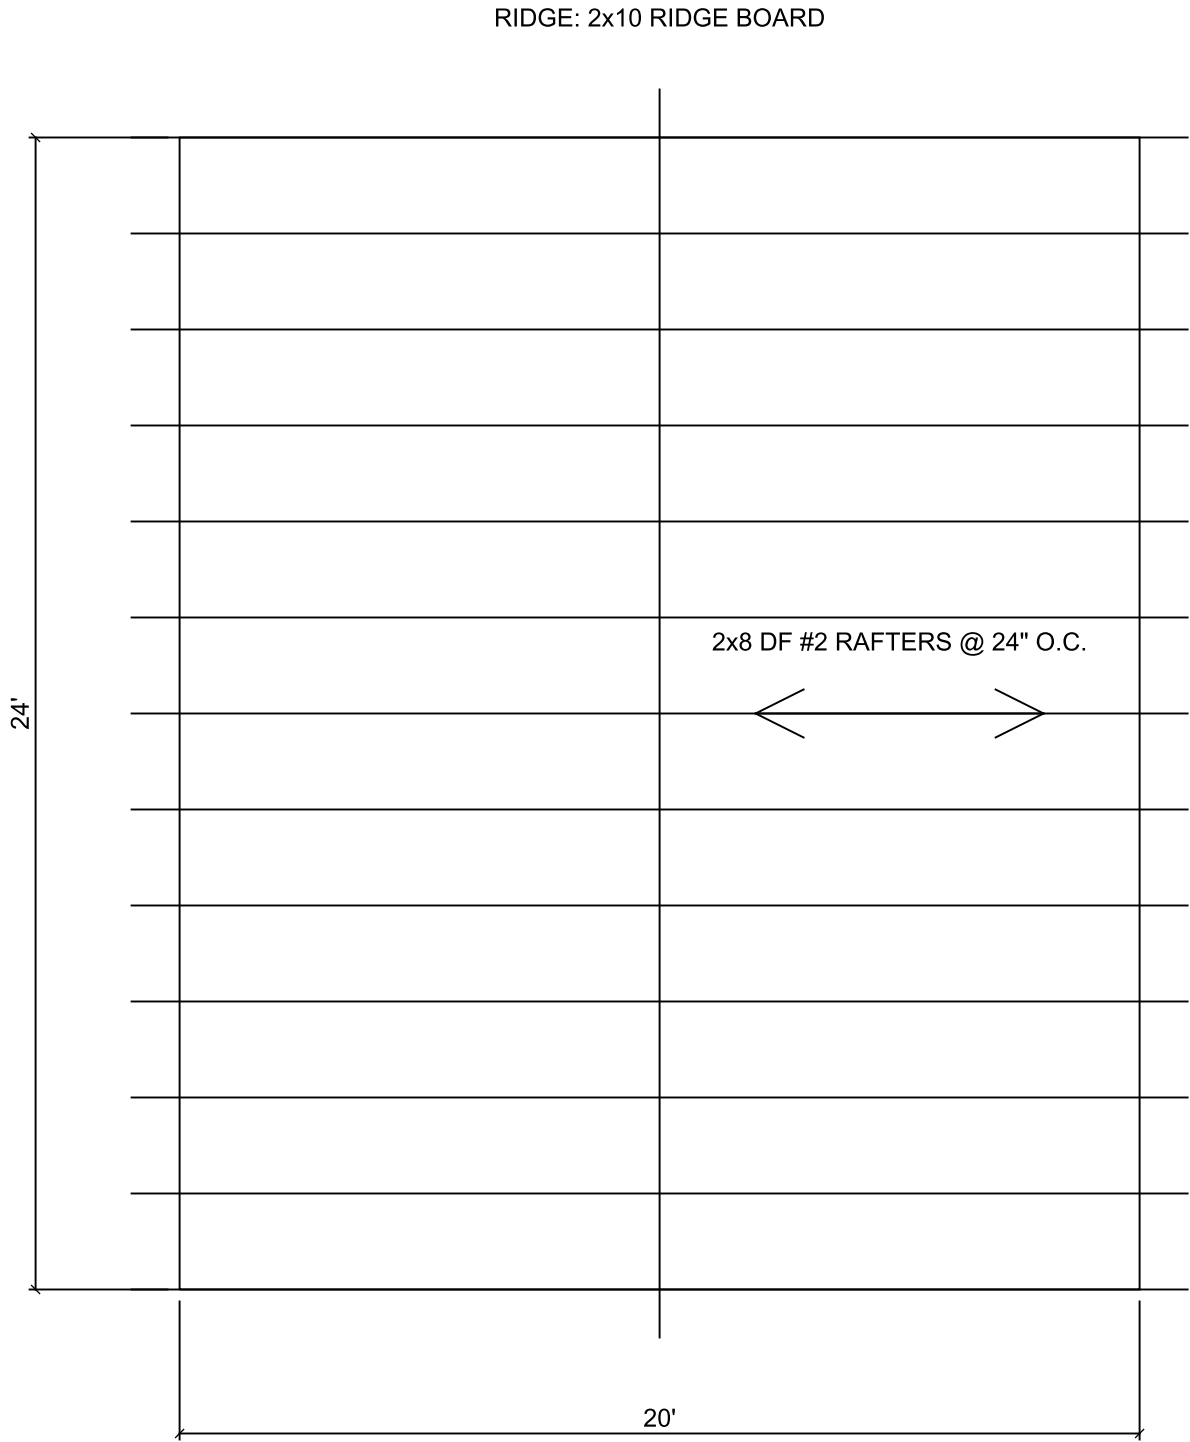

ROOF FRAMING PLAN

- FRAMING NOTES
- MEMBER SPANS: VERIFY PER CRC TABLES R802.4.1(1)-(9).
 - BLOCKING: SOLID BLOCK ALL MEMBERS AT EXTERIOR WALLS (CRC R802.8).
 - SHEATHING: NAILING 8d @ 6 IN EDGES / 12 IN FIELD PER CRC TABLE R602.3(1); PANEL EDGES NAILED TO BLOCKING.
 - UPLIFT CONNECTORS WHERE UPLIFT EXCEEDS 200 LB PER MEMBER (CRC TABLE R802.11).
 - ATTIC VENTILATION: 1/150 (OR 1/300 PER R806.2 EXCEPTIONS).
 - HEADERS PER CRC TABLE R602.7 UNLESS NOTED.
 - RAFTER TIES MIN 2x4 @ 48 IN O.C. MAX (CRC R802.5.2.2) OR RIDGE BEAM WITH SUPPORTS; COLLAR TIES PER CRC R802.4.6.
 - PRELIMINARY SKELETON: A QUALIFIED PROFESSIONAL MUST VERIFY ALL MEMBER SIZES, SPANS, AND CONNECTIONS BEFORE SUBMITTAL.